


Set 6.1/6.2


Sliding door MANET for installation at glass, sidelights on both sides

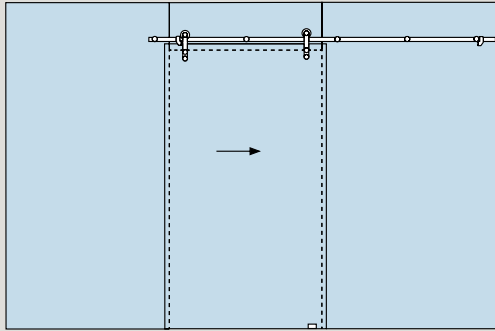

for sliding door 8 – 13.5 mm glass,
fixed element 10 – 13.5 mm glass

Set 6.1
with countersunk single-point fixings

Set 6.2
with clamping disc single-point fixings

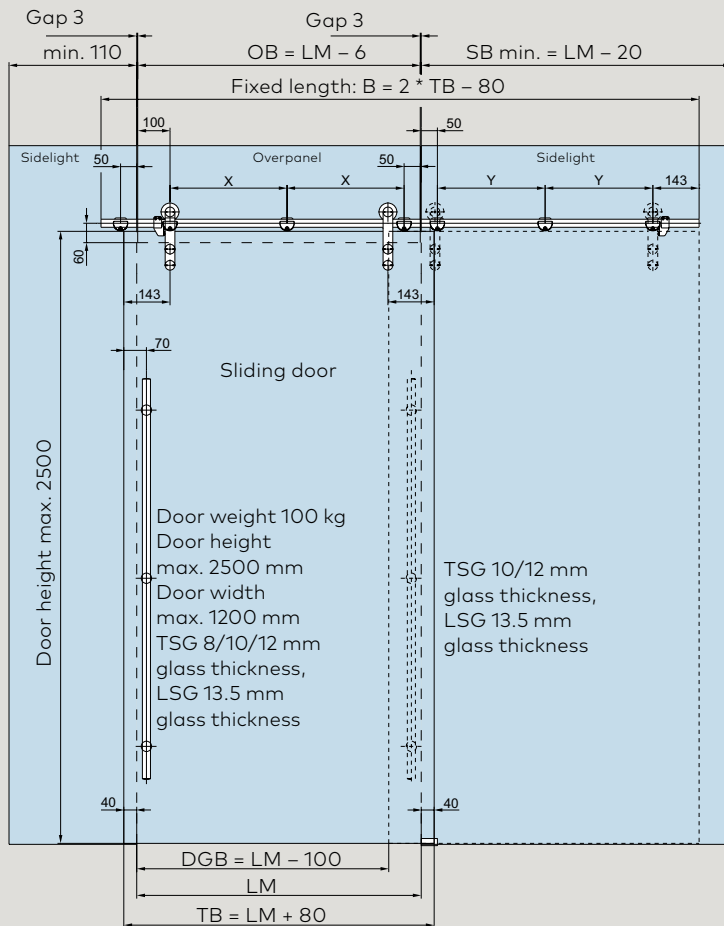


An appropriately dimensioned and torsionally stiff substructure will need to be provided for installation.

- LM = Daylight opening
- TB = Door width
- DGB = Entry width
- OB = Overpanel width
- SBmin. = min. sidelight width


- B = Tubular track length
- X = Center distance between single-point fixings overpanel
(OB - 150) * 1/2
- Y = Center distance between single-point fixings sidelight
Y = X - 29

Glass preparation for sliding door system


Sliding door to wall

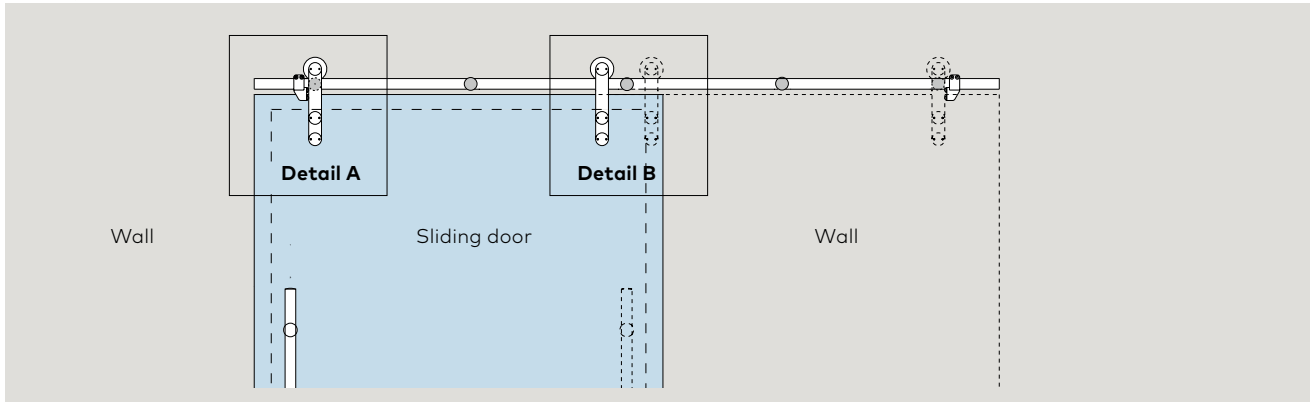


Sliding door with sidelight and overpanel


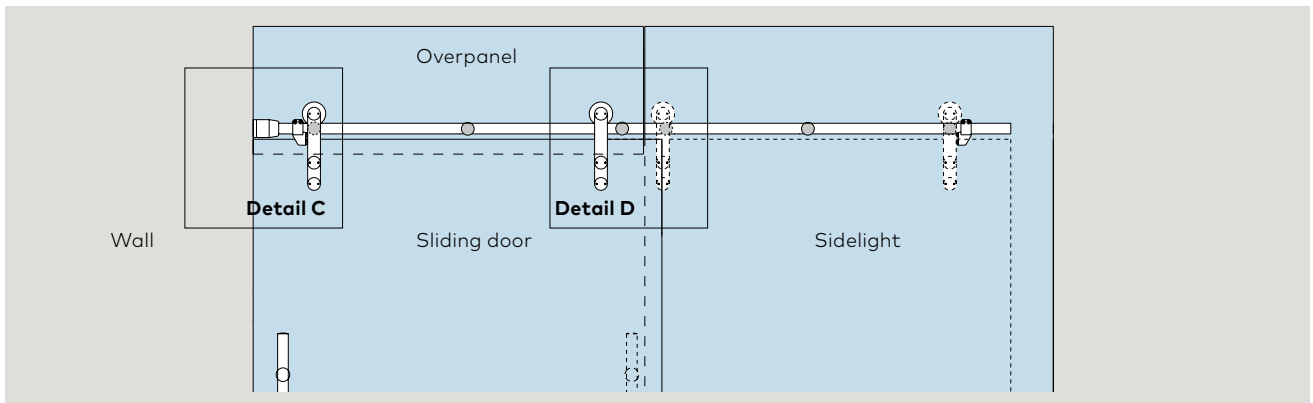


Sliding door with two sidelights and overpanel

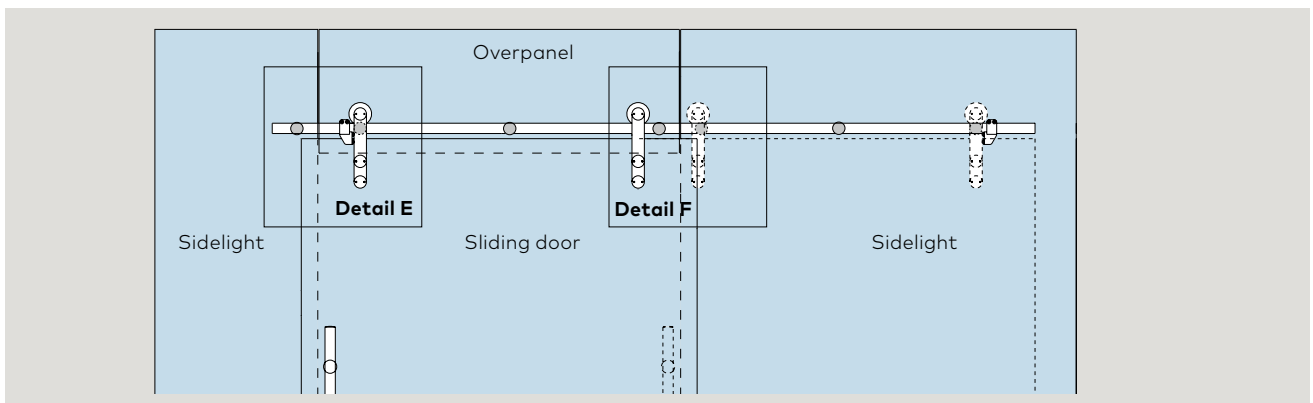


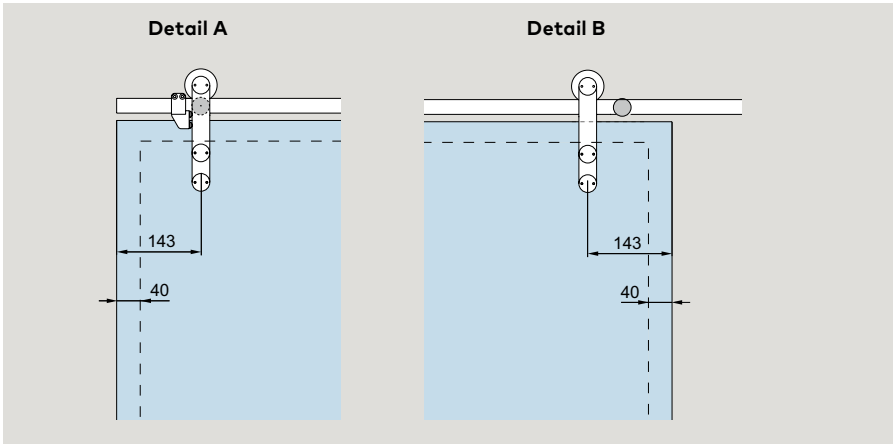


Sliding door with solid track

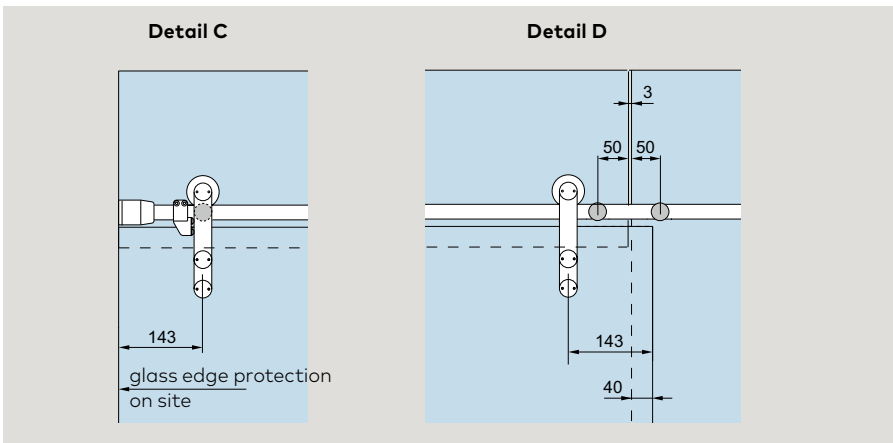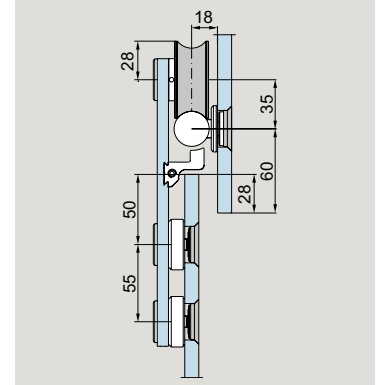

Sliding door with tubular track and clamp fixing

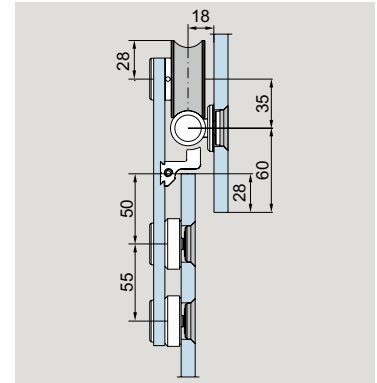


Dimensional data should be regarded exclusively as recommended values. Please remember when designing your system that the positions of the stops and point fixings must not vertically coincide. For spacing/interval recommendations when drilling the track holes, and for requisite dimensions for fixing the track rail, please refer to the table entitled "Recommended distance of the track fixing points".

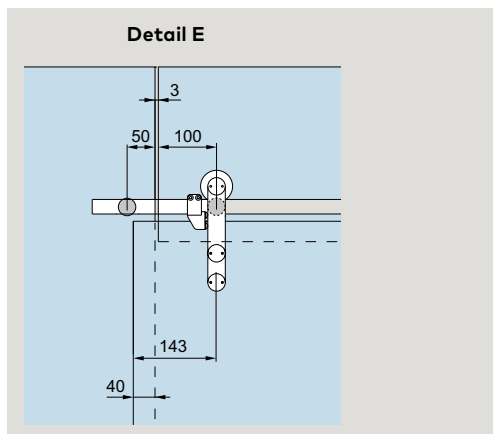

Countersunk bore for countersunk single-point fixings

Cylindrical bore for clamping disc single-point fixings

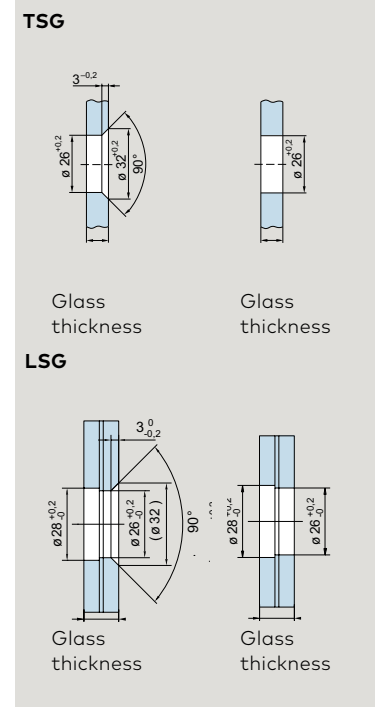

An appropriately dimensioned and torsionally stiff substructure needs to be provided for installation.